

## TL - TXL TENTS



SET-UP IN LESS THAN 45 MINUTES



5 PEOPLE



NONE

### COMMERCIAL DESCRIPTION

TL and TXL tents follow a quick system of deploy requiring only manpower to set-up, no MHE. The size of the tent can be lengthened by 5 meters sections.

The ease of assembly and versatility of this range make it a very popular product.



### TECHNICAL DESCRIPTION

#### Standard configuration :

- Colours : white, sand or NATO green
- One 1.8m-wide door on each gable with a zip system
- Windows with transparent welded layer + external or internal shutter (85 x 62 cm) + mosquito net on doors (70 x 45 cm)
- Ground sheet welded on sides or attached by Velcro + straps on gable
- Specific design of the ground sheet to exclude water intrusion
- Possibility to suspend an inner liner
- Connections flaps all around each of the doors for interconnection of tents in H, I, T or X configurations
- 2 duct openings for ducts or cables
- 1 tightness flap for tent connection
- Staking kit

## TL AND TXL TENTS

offer a long area of use. The TL-TXL model has a modular 5 m section which can be replicated to create large unobstructed versatile space. The shelters also allow direct interface with the SM and TM shelter models.

## HIGH QUALITY MANUFACTURING


The TL and TXL tents are made of resistant and quality materials.



- ▶ Bars and mechanical parts made from anodized or epoxy coated aluminium alloy.  
Axles and foot plates made from stainless steel.  
Eyelets, toggles, hooks and screws are made from hot-dip galvanized steel that provides high corrosion resistance (salt spray testing for 168 hours).
- ▶ Main canvas manufactured from 500 g/m<sup>2</sup> polyester material coated with PVC from both sides.  
All shelters use high frequency welding techniques.

## OPTIONS

The TL and TXL tents can benefit from the following options :

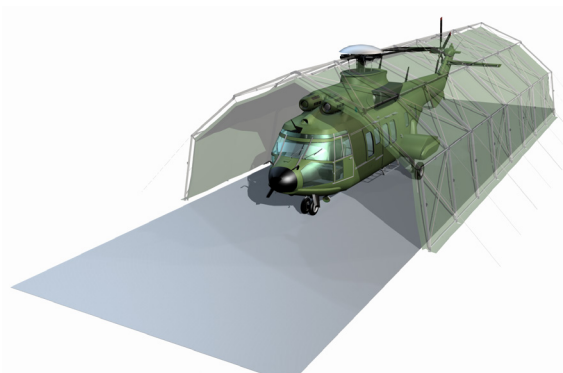

- ▶ Options :
  - Colour on demand
  - 3 windows on each side (70 x 45 cm)
  - Mosquito nets on lateral windows
  - Flaps on the zips to prevent light penetration
  - Additional lateral doors (6 maximum)
  - 1.8 or 2.6 m-wide doors
  - Internal and external protective ground sheets
  - Marking and/or logo
  - Additional duct openings
  - Inner liner or insulating liner
  - CBRN liner
  - Thermal fly
  - Repair kit



ZAC Eurotransit - Rue Abbé Mariotte - BP 64 - 57365 ENNERY – FRANCE

[www.utilis-international.com](http://www.utilis-international.com)

CAMPEMENTS

TENTES

ACCESSOIRES

HOPITAUX

COLPRO

DECONTA

HANGARS

SERVICES